

Driveshaft Order Form

☎ 519-737-9333
 📠 519-737-7793

e-mail : info@bearsperformance.com

BEARS
Performance Products


BILLING ADDRESS		
Name:		
Phone:		
Address		
City	State	Zip

SHIPPING ADDRESS		
Name:		
Phone:		
Address		
City	State	Zip

(same as billing)

ORDER DETAILS	
Package #	
Transmission:	
Output Shaft Spline:	
<input type="checkbox"/> Bushing	<input type="checkbox"/> Roller bearing

Measurement References

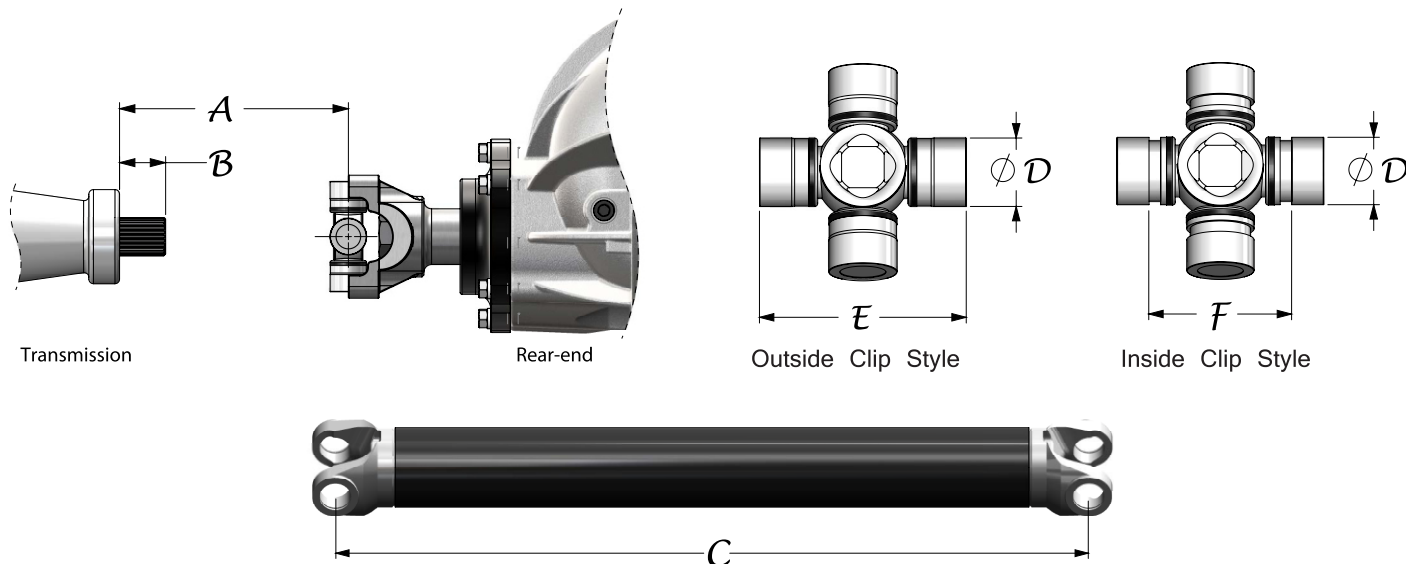

Ordering Driveshaft only (no trans. yoke)	
D	_____
E (Outside Clip Style)	_____
F (Inside Clip Style)	_____
C	_____

Ordering Driveshaft with Strange supplied trans. yoke	
A	_____
B	_____
D	_____
E	_____
I (LENCO Trans.)	_____
J (LENCO Trans.)	_____


Conversion U-joints

- ☐ All Strange driveshafts have 1350 series weld ends installed unless otherwise specified ($D=1.1875$ $E=3.625$)
- ☐ All conversion u-joints are "cross-drilled" style

Conversion U-joint	D	E
U1645*	1.125	3.625
U1646	1.0625	3.217
U1647	1.0625	3.625
U1648	1.125	3.625

*U1645 uses inside clips $F=2.645$

LENCO Trans. Measurement References

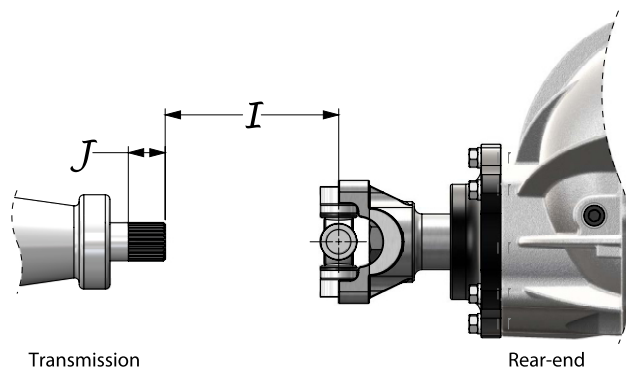

Dimension Definitions

A Distance from the transmission face to the center of the u-joint when installed in the pinion yoke

B Distance from the transmission face to the end of the output shaft

C The distance between axle shaft weld yoke centers

D Diameter of the u-joint cap

Outside snap-ring style u-joints only

E Distance between the u-joint cap faces

Inside snap-ring style u-joints only

F Distance between the outer edges of the u-joint snap ring-grooves

LENCO Transmission only

I Distance between the transmission output shaft face and center of u-joint when installed in pinion yoke

LENCO Transmission only

J Distance of the spline length on the transmission output shaft